(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 2 June 2005 (02.06.2005)

PCT

(10) International Publication Number WO 2005/049209 A1

(51) International Patent Classification⁷:

B01L 3/02

(21) International Application Number:

PCT/FI2004/000694

(22) International Filing Date:

18 November 2004 (18.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 20031683

19 November 2003 (19.11.2003) FI


- (71) Applicant (for all designated States except US): THERMO ELECTRON OY [FI/FI]; Ratastie 2, FI-01620 Vantaa (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): TELIMAA, Juha

[FI/FI]; Kaartotie 33, FI-04430 Järvenpää (FI). SALO, Vesa [FI/FI]; Kumpulantie 11, FI-05200 Rajamäki (FI). LIND, Mikael [FI/FI]; Reiherintie 1, FI-00870 Helsinki (FI).

- (74) Agent: BERGGREN OY AB; P.O. Box 16 (Jaakonkatu 3 A), FI-00101 Helsinki (FI).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: PIPETTE WITH A TIP REMOVING MECHANISM

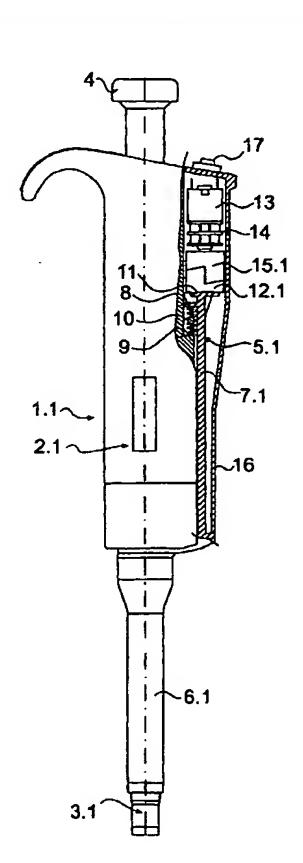

(57) Abstract: The invention relates to a pipette, comprising a tip remover element (6.1) which, upon moving it against a tip, disengages the tip. The remover element is operated with a mechanism, comprising a rotatable ramp member (15.1) which is provided with a circle-forming ramp surface, including one or more segments within which the ramp surface has a high point and a low point, whereby the ramp surface, upon rotating through a single segment, forces the remover element (6.1) first to move against the tip and then allows it to return.

WO 2005/049209 A1

WO 2005/049209 A1

GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.